


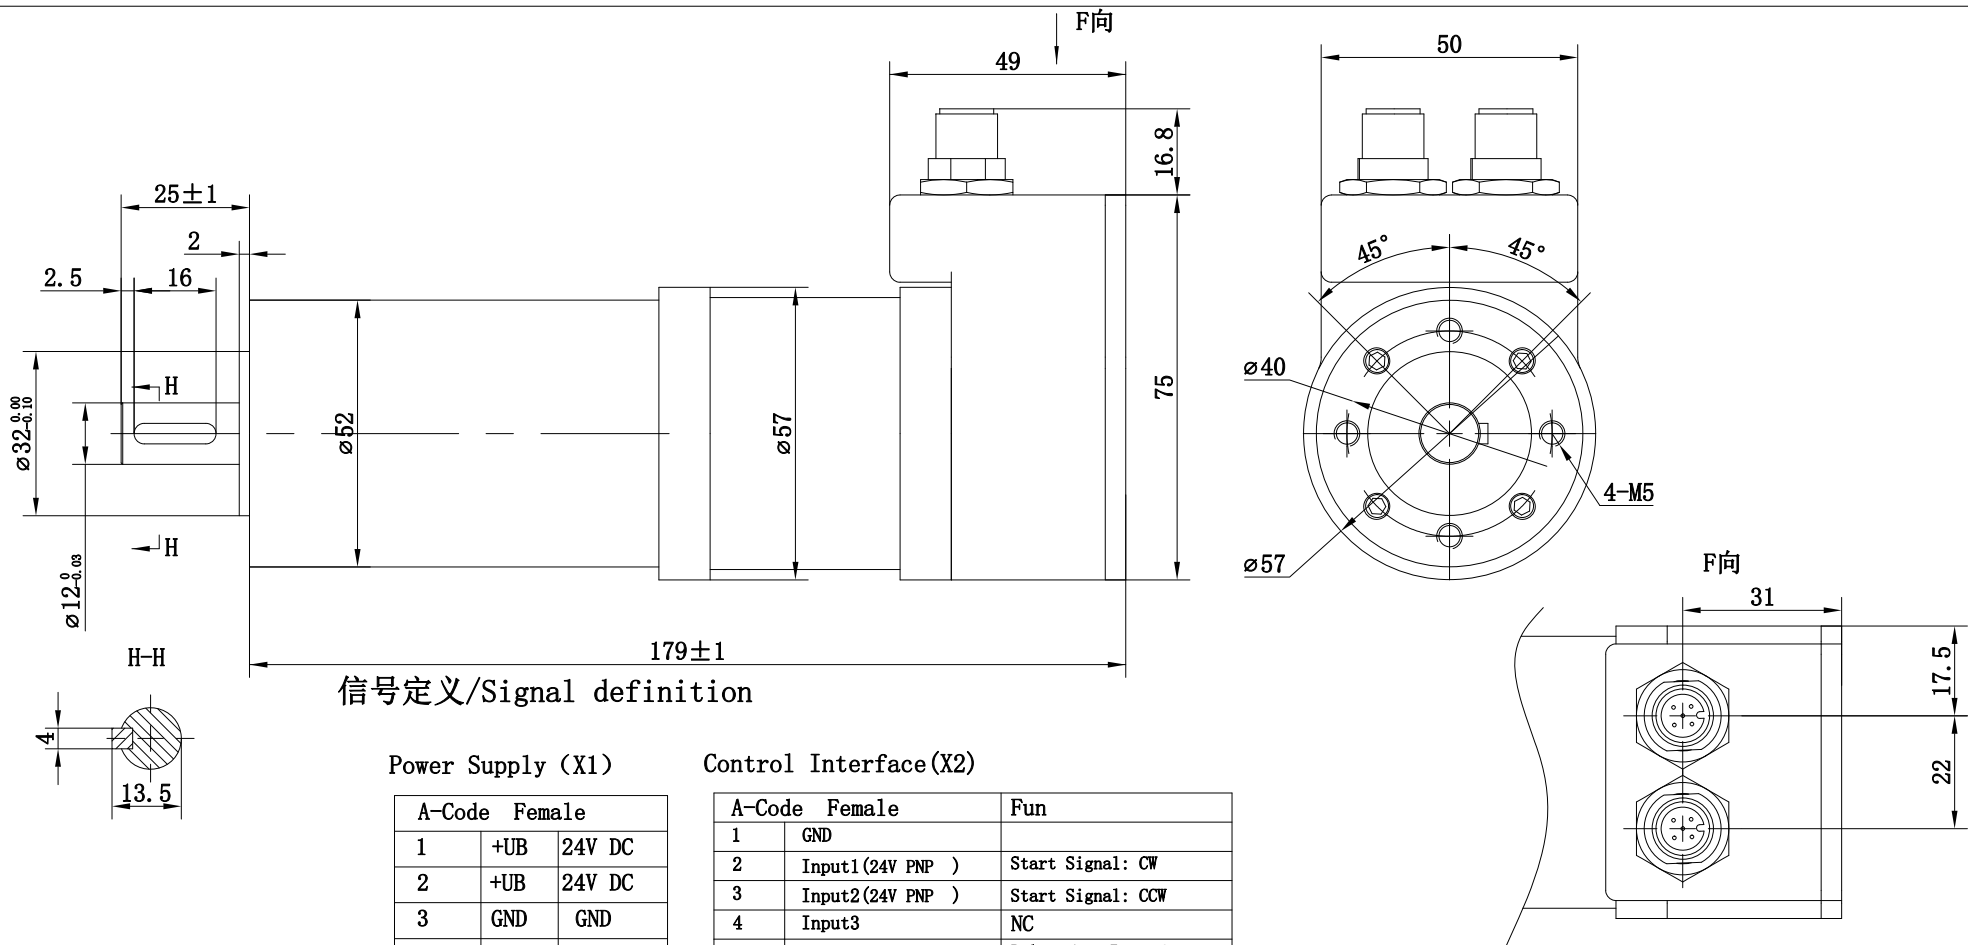

电动机规格书/Motor Specification

NUMBER OF POLES	8
NOMINAL VOLTAGE	24 VDC
RATED TORQUE	26 Nm
RATED SPEED	15±10% RPM
OUTPUT POWER	62 W
RATED CURRENT	4 A
BACK EMF CONSTANT	0.045 N·m/A

Start Forward Rotation:

Activate Input1 continuously, and apply an analog signal(>0V) to adjust the speed. The motor stops when Input1 is deactivated (or when the analog signal drops to 0).

Start Reverse Rotation:

Activate Input2 continuously, and apply an analog signal(>0V) to adjust the speed. The motor stops when Input2 is deactivated (or when the analog signal drops to 0).

*Output preset status: Fault: OFF Normal: ON

Note: Output is open-drain (open collector), requiring pull-up resistor and signal voltage.

Integrated Motor 一体化直流电机

RoHS COMPLIANT			
CE			
C			
B	提高电机转速/修改Output预设逻辑	J. song	26.03.12
A	初版/First Edition		
版本	变更内容	设计	日期
Edition	Revisions	Designed	DATE

型号	Model PEC57BLS06B2-JXE220						
批准	J. Song	24.12.11		材质			
审核	CB. Y	24.12.11		Material		No.	Sheet
制图	QC. Y	24.12.11		版本	Rev B	页	1/1
Drawn				Version		Sheet	