


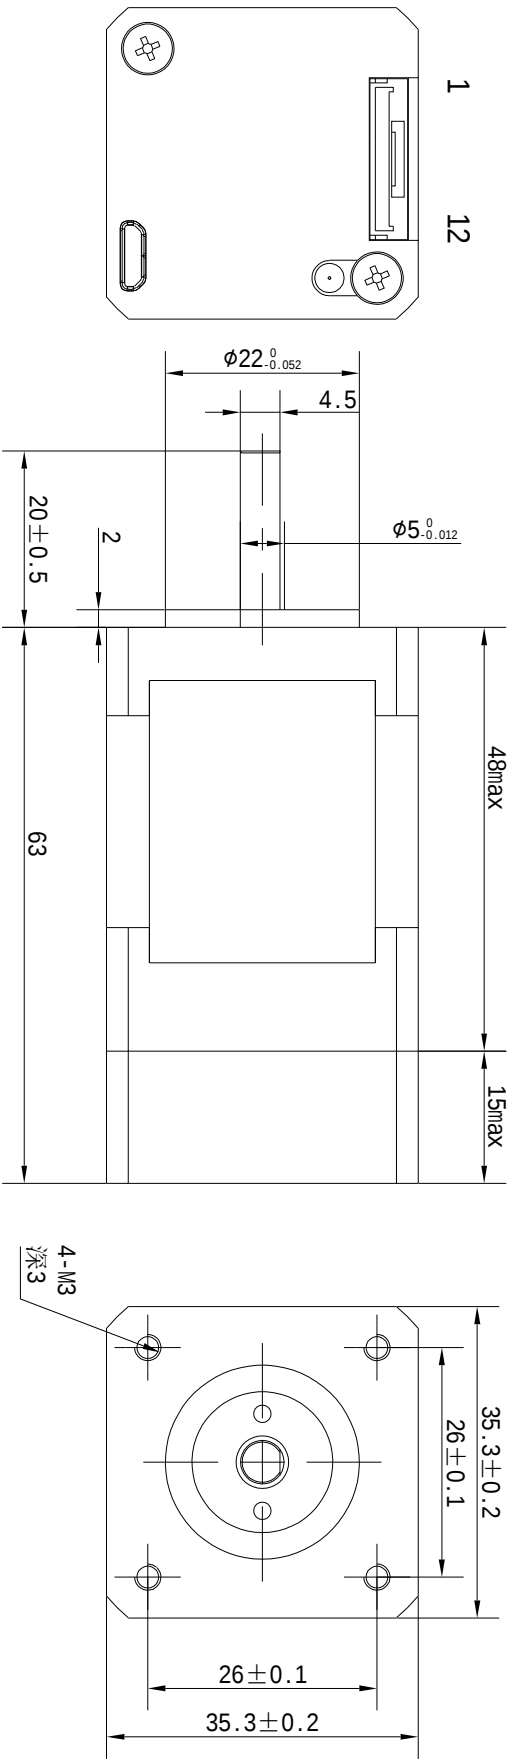

脉冲版本Pulse version		
PIN No.	Function	Note
1	电源正(V+)	连接电源(9-36VDC) Connecting the power supply
2	电源负(V-)	
3	脉冲正(PU+)	输入信号 Input signal
4	脉冲负(PU-)	
5	方向正(DR+)	
6	方向负(DR-)	
7	使能正(EN+)	
8	使能负(EN-)	输出信号 Output signal
9	报警正(AL+)	
10	报警负(AL-)	
11	到位正(EX+)	
12	到位负(EX-)	

通讯版本Communication version		
PIN No.	Function	Note
1	电源正(V+)	连接电源(9-36VDC) Connecting the power supply
2	电源负(V-)	
3	输入0正(X0+)	输入信号 Input signal
4	输入0负(X0-)	
5	输入1正(X1+)	
6	输入1负(X1-)	
7	输出2正(X2+)	
8	输出2负(X2-)	输出信号 Output signal
9	输出0正(Y0+)	
10	输出0负(Y0-)	通讯接口 Communication interface
11	485A/CAN_L	
12	485B/CAN_H	

WWW.YANLANMC.COM/info@yanlan.net

S14HS4815E-X

RoHS COMPLIANT		CE
C		
B		
A	初版/First Edition	
版本	变更内容	
Revision	Revisions	
设计	设计	日期
Designed	DATE	

系列		35系列 一体化电机	
批准	J. Song	26.08.01	
审核	CB. Y	26.08.01	
制图	QC. Y	26.08.01	